

FOREST BAY



TR-138 in white with colonial windows

Timeless, Stylish & Affordable!



TR-II in earthtone with colonial windows

The Forest Bay collection of insulated thermal doors combines the stylish appearance of woodgrained embossment with the rugged durability of heavy gauge steel thermally bonded to dense polystyrene insulation. This collection delivers thermal efficiency available in three door thicknesses – 1 3/8, 2 & 3 inch, while offering a full range of colors and window options. Strength and beauty come together in one package tailor made to fit your tastes!

FOREST BAY OPTIONS


Panel Options



CLASSIC



LONG

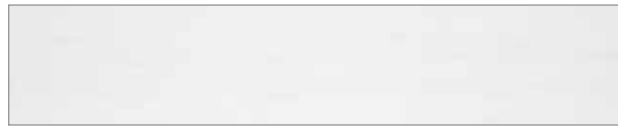

FLUSH

Window Options

TR & TF



CASCADE



CATHEDRAL



COLONIAL



PLAIN



SUNBURST



SAVANNA



SHERWOOD

LP



HERITAGE



PLAIN LONG PANEL



STOCKBRIDGE




STOCKTON




WYNDBRIDGE

Color Options*


¹ Woodgrain colors not available in TF models.




WHITE



ALMOND



SANDSTONE



BEIGE



EARTHTONE



SEPIA



BROWN



GREEN




BLACK



GOLDEN OAK¹



MEDIUM OAK¹



WALNUT¹

*Printed colors may vary slightly from actual colors. Please visit your local dealer for actual color swatches.

FOREST BAY PRODUCT INFORMATION



LP-138 in sandstone with wyndbridge windows

ADDITIONAL FEATURES

- Woodgrain embossed, hot-dipped galvanized steel is pre-finished exterior and interior then coated with baked-on polyester primer and acrylic finish.
- Wind load package available.
- Keyed or slide lock set.
- Nylon rollers for quiet operation.
- Window glass available - double strength or insulated.
- Environmentally friendly polystyrene insulation.

WHY CHOOSE NORTH CENTRAL DOOR?

North Central Door Company understands that you have high standards when it comes to enhancing the appearance of your home. That is why we have been uncompromising in maintaining the high quality of our products since our beginning in 1966.

CONSTRUCTION



- 3-layer thermal door with section thickness available in 1 3/8", 2" and 3".
- Polystyrene insulation bonded to 26-gauge steel skin providing thermal protection to the edge of each section.
- Uniquely designed tongue & groove section joints create a weather-resistant seal against rain, snow and wind.
- Durable PVC seals provide a continuous thermal break on all section joints, reducing thermal transmissions.
- 18-gauge hot-dipped galvanized stiles are carried the full height of the sections providing superior strength and durability compared with commonly used hinge pads.
- Hinges are 14-gauge, hot-dipped galvanized steel for lasting durability.
- Heavy-duty "U" shaped bottom weather seal helps protect against elements.
- R-values per section thickness: 1 3/8" = 6.9, 2" = 8.8 & 3" = 15.1

For complete specifications, visit northcentraldoor.com

Distributed By:



As NCDC continuously strives to improve our products, all specifications listed on this brochure are subject to change without notice or obligation.

NCDC111319



northcentral
DOOR COMPANY

WWW.NORTHCENTRALDOOR.COM